

DIESEL PRODUCTS

50 Hz



 **TEKSAN**

GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)								WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**				OPEN SKID kg	CANOPIED kg	OPEN SKID lt	CANOPIED lt	
				Width	Length	Height	Canopy Type	Width	Length	Height					



TJ10PE	403A-11G1	10	9	700	1250	1000	HK	700	1750	1200	330	497	75	75
TJ15PE	403A-15G1	14	13	700	1250	1000	HK	700	1750	1200	341	508	75	75
TJ22PE	404A-22G1	22	20	700	1350	1050	HK	700	1750	1200	403	570	75	75
TJ33PE	1103A-33G	33	30	950	1650	1220	HK	950	2200	1450	712	986	90	90
TJ45PE	1103A-33TG1	44	40	950	1650	1220	HK	950	2200	1450	748	1022	90	90
TJ50PE	1103A-33TG1	50	45	950	2000	1230	HK	950	2650	1450	834	1148	90	90
TJ66PE	1103A-33TG2	66	60	950	2000	1230	HK	950	2650	1450	872	1186	160	160
TJ72PE	1104A-44TG1	73	66	950	2000	1230	HK	950	2650	1450	1052	1366	160	160
TJ83PE	1104A-44TG2	83	75	950	2000	1230	HK	950	2650	1450	1052	1366	160	160
TJ90PE	1104A-44TG2	89	81	950	2000	1230	HK	950	2650	1450	1091	1405	160	160
TJ100PE	1104C-44TAG2	100	90	950	2000	1250	HK	950	2650	1450	1051	1365	160	160
TJ110PE	1104C-44TAG2	110	100	1100	2350	1250	HK	1100	3320	1600	1186	1607	160	160
TJ140PE	1106A-70TG1	138	125	1100	2350	1350	HK	1100	3320	1600	1497	1918	260	260
TJ150PE	1106A-70TG1	150	136	1100	2350	1350	HK	1100	3320	1600	1497	1918	260	260
TJ165PE	1106A-70TAG2	166	151	1200	2700	1470	HK	1200	3860	1850	1677	2218	330	330
TJ180PE	1106A-70TAG3	182	165	1200	2700	1470	HK	1200	3860	1850	1630	2171	330	330
TJ200PE	1106A-70TAG3	204	184	1200	2700	1470	HK	1200	3860	1850	1751	2292	330	330
TJ220PE	1106A-70TAG4	220	200	1200	2700	1470	HK	1200	3860	1850	1751	2292	330	330
TJ250PE	1206A-E70TTAG2	252	228	1200	2700	1730	HK	1200	3860	1850	1948	2489	330	330
TJ275PE	1206A-E70TTAG3	275	250	1200	2700	1730	HK	1200	3860	1850	1948	2489	330	330
TJ300PE	1706A-E93TAG1	303	275	1300	3000	1680	HK	1300	3940	1850	2740	3305	385	385
TJ350PE	1706A-E93TAG1	345	313	1300	3000	1680	HK	1300	3940	1850	2515	3080	385	385
TJ390PE	1706A-E93TAG2	390	355	1300	3000	1680	HK	1300	3940	1850	2515	3080	385	385
TJ400PE	2206A-E13TAG2	406	357	1650	3300	2050	HK	1650	5000	2250	3426	4412	900	900
TJ440PE	2206A-E13TAG3	440	400	1650	3300	2050	HK	1650	5000	2250	3511	4497	900	900
TJ450PE	2206A-E13TAG3	450	407	1650	3300	2050	HK	1650	5000	2250	3373	4359	900	900



EN * The indicated Prime Power (PRP) is for reference only. This generator set is designed for emergency standby power (ESP) applications only.

** SC: Standart Canopy, DOC: Drop Over Canopy, CC: Container Canopy

• Technical information and values comply with ISO8528, ISO3046, NEMA MG-1.22, IEC600341, BS4999-5000, VDE0530 standards.

• Production in accordance with ISO ISO9001, ISO14001, OHSAS18001, TSE, CE standards.

• Due to policy of continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sale

GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)							WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**				OPEN SKID kg	CANOPIED kg	OPEN SKID lt	CANOPIED lt
				Width	Length	Height	Canopy Type	Width	Length	Height				

Perkins

TJ500PE	2506A-E15TAG1	511	467	1650	3500	2050	HK	1650	5360	2250	4021	5086	970	970
TJ550PE	2506A-E15TAG2	550	500	1650	3500	2050	HK	1650	5360	2250	4021	5086	970	970
TJ600PE	2806A-E18TAG1A	600	550	1650	3500	2160	HK	1650	5360	2450	4058	5199	970	970
TJ660PE	2806A-E18TAG1A	660	600	1650	3500	2160	HK	1650	5360	2450	4107	5248	970	970
TJ680PE	2806A-E18TAG1A	680	620	1650	3500	2160	HK	1650	5360	2450	4425	5566	970	970
TJ720PE	2806A-E18TAG2	723	671	1650	3500	2160	HK	1650	5360	2450	4358	5499	970	970
TJ800PE	2806A-E18TAG5	805	730	1700	3400	2330	HK	2200	5820	2400	4833	7548	1080	1600
TJ815PE	4006-23TAG2A	821	746	1700	3800	2285	HK	2200	5820	2400	6009	8609	1135	1600
TJ840PE	2806A-E18TAG5	841	763	1700	3400	2330	HK	2200	5820	2400	4894	7609	1080	1600
TJ850PE	2806A-E18TAG5	855	774	1700	3400	2330	HK	2200	5820	2400	5096	7811	1080	1600
TJ890PE	4006-23TAG3A	886	794	1700	3700	2285	HK	2200	5820	2400	5848	8448	1135	1600
TJ900PE	4006-23TAG3A	902	807	1700	3800	2285	HK	2200	5820	2400	6503	9103	1135	1600
TJ1000PE	4008TAG1A	1006	915	2050	4660	2370	HK	2200	5820	2400	7847	10277	1540	1540
TJ1100PE	4008TAG2	1110	1010	2050	4660	2370	HK	2200	5820	2400	7847	10277	1540	1540
TJ1250PE	4008-30TAG3	1250	1112	2050	4660	2300	HK	2200	5820	2400	8047	10477	1540	1540
TJ1400PE	4012-46TWG2A	1400	1250	2050	4700	2470	KK	2470	6080	2900	9536	13226	TBA	TBA
TJ1490PE	4012-46TWG3A	1485	1350	2050	4600	2640	KK	2470	6080	2900	9763	13453	TBA	TBA
TJ1500PE	4012-46TWG3A	1516	1382	2050	4800	2640	KK	2470	6080	2900	9983	13673	TBA	TBA
TJ1650PE	4012-46TAG2A	1650	1539	2250	5000	2420	KK	2470	9145	3100	9972	16052	TBA	TBA
TJ1800PE	4012-46TAG3A	1800	1640	2250	5000	2800	KK	2470	9145	3150	10404	16484	TBA	TBA
TJ1900PE	4012-46TAG3A	1902	1733	2250	5130	2800	KK	2470	9145	3150	10849	16929	TBA	TBA
TJ2000PE	4016-61TRG1	2024	1876	2250	6000	2560	KK	2470	12220	3150	11936	19556	TBA	TBA
TJ2200PE	4016-61TRG2	2200	2024	2250	6000	2560	KK	2470	12220	3150	11956	19576	TBA	TBA
TJ2270PE	4016-61TRG2	2273	2024	2250	6000	2560	KK	2470	12220	3150	12066	19686	TBA	TBA
TJ2500PE	4016-61TRG3	2502	2256	2250	6000	2750	KK	2470	12220	3150	12705	20225	TBA	TBA



* The indicated Prime Power (PRP) is for reference only. This generator set is designed for emergency standby power (ESP) applications only.

** SC: Standart Canopy, DOC: Drop Over Canopy, CC: Container Canopy

• Technical information and values comply with ISO8528, ISO3046, NEMA MG-1.22, IEC600341, BS4999-5000, VDE0530 standards.

• Production in accordance with ISO ISO9001, ISO14001, OHSAS18001, TSE, CE standards.

• Due to policy of continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sale

GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)								WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**					OPEN SKID kg	CANOPIED kg	OPEN SKID lt	CANOPIED lt
				Width	Length	Height	Canopy Type	Width	Length	Height					




TJ90DW	D1146	88	82	1100	2350	1480	HK	1100	3320	1600	1324	1745	260	260
TJ110DW	D1146T	110	100	1100	2350	1480	HK	1100	3320	1600	1477	1898	260	260
TJ130DW	D1146T	131	119	1100	2350	1480	HK	1100	3320	1600	1538	1959	260	260
TJ175DW	P086TI	176	160	1200	2700	1650	HK	1200	3860	1850	1763	2304	330	330
TJ180DW	P086TI	182	165	1200	2700	1650	HK	1200	3860	1850	1716	2257	330	330
TJ200DW	P086TI	200	180	1200	2700	1650	HK	1200	3860	1850	1837	2378	330	330
TJ220DW	P086TI	220	200	1200	2700	1650	HK	1200	3860	1850	1837	2378	330	330
TJ275DW	P126TI-I	275	250	1300	3000	1700	HK	1300	3940	1850	2120	2685	385	385
TJ300DW	P126TI-II	303	275	1300	3000	1700	HK	1300	3940	1850	2254	2819	385	385
TJ330DW	P126TI-II	335	302	1300	3000	1700	HK	1300	3940	1850	2354	2919	385	385
TJ350DW	DP126LA	350	324	1650	3060	1970	HK	1650	4700	2250	2838	3758	780	780
TJ400DW	DP126LB	403	365	1650	3160	1970	HK	1650	4700	2250	2914	3834	780	780
TJ440DW	P158LE	440	400	1650	3000	1970	HK	1650	4700	2250	2941	3861	780	780
TJ450DW	P158LE	450	405	1650	3000	1970	HK	1650	4700	2250	2803	3723	780	780
TJ470DW	P158LE	470	411	1650	3000	1970	HK	1650	4700	2250	3171	4091	780	780
TJ500DW	DP158LC	509	463	1650	3100	1970	HK	1650	4700	2250	3399	4319	780	780
TJ550DW	DP158LD	550	500	1650	3300	1970	HK	1650	5000	2250	3214	4200	900	900
TJ580DW	DP158LD	584	531	1650	3300	1970	HK	1650	5000	2250	3454	4440	900	900
TJ600DW	DP180LA	600	550	1650	3300	2000	HK	1650	5000	2250	3488	4474	900	900
TJ630DW	DP180LA	633	575	1650	3340	2000	HK	1650	5000	2250	3855	4841	900	900
TJ660DW	DP180LB	660	600	1650	3500	2000	HK	1650	5360	2250	3558	4623	970	970
TJ700DW	DP180LB	708	641	1650	3500	2000	HK	1650	5360	2250	3809	4874	970	970
TJ730DW	DP222LB	730	660	1650	3500	2250	HK	1650	5360	2450	4281	5422	970	970
TJ750DW	DP222LB	750	680	1650	3550	2250	HK	1650	5360	2450	4281	5422	970	970
TJ830DW	DP222LC	830	750	1650	3510	2250	HK	1650	5360	2450	4277	5418	970	970
TJ850DW	DP222CB	850	750	TBA	TBA	TBA	HK	TBA	TBA	TBA	TBA	TBA	TBA	TBA
TJ900DW	DP222CB	917	817	TBA	TBA	TBA	HK	TBA	TBA	TBA	TBA	TBA	TBA	TBA



GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)								WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**					OPEN SKID kg	CANOPIED kg	OPEN SKID lt	CANOPIED lt
				Width	Length	Height	Canopy Type	Width	Length	Height					



GENSET MODEL	ENGINE MODEL	kVA ESP	kVA PRP	Width	Length	Height	Canopy Type	Width	Length	Height	OPEN SKID (kg)	CANOPIED (kg)	OPEN SKID (lt)	CANOPIED (lt)
TJ1400MS	S12R PTA	1400	1250	2050	4500	2390	KK	2470	6080	2930	9446	13136	TBA	TBA
TJ1500MS	S12R PTA2	1532	1391	2050	4500	2390	KK	2470	6080	2930	9983	13673	TBA	TBA
TJ1650MS	S12R PTAA2	1650	1525	2200	5020	2580	KK	2470	9145	3150	10063	16143	TBA	TBA
TJ1700MS	S12R F1PTAW2	1716	1560	2200	5260	2590	KK	2470	9145	3150	10273	16353	TBA	TBA
TJ1900MS	S16R PTA	1908	1750	2250	5210	2950	KK	2470	9145	3150	12413	18493	TBA	TBA
TJ2100MS	S16R PTA2	2089	1902	2250	5400	2950	KK	2470	9145	3150	12548	18628	TBA	TBA
TJ2200MS	S16R PTAA2	2200	2024	2270	6000	2910	KK	2470	12220	3150	13184	20704	TBA	TBA
TJ2500MS	S16R2 PTAW	2529	2284	2390	6300	3220	KK	TBA	TBA	TBA	15474	TBA	TBA	TBA
TJ2650MS	S16R2 PTAW-E	2650	2404	2390	6150	3220	KK	TBA	TBA	TBA	15965	TBA	TBA	TBA
TJ2800MS	S16R2 PTAW2-E	2792	2530	2390	6300	3220	KK	TBA	TBA	TBA	TBA	TBA	TBA	TBA

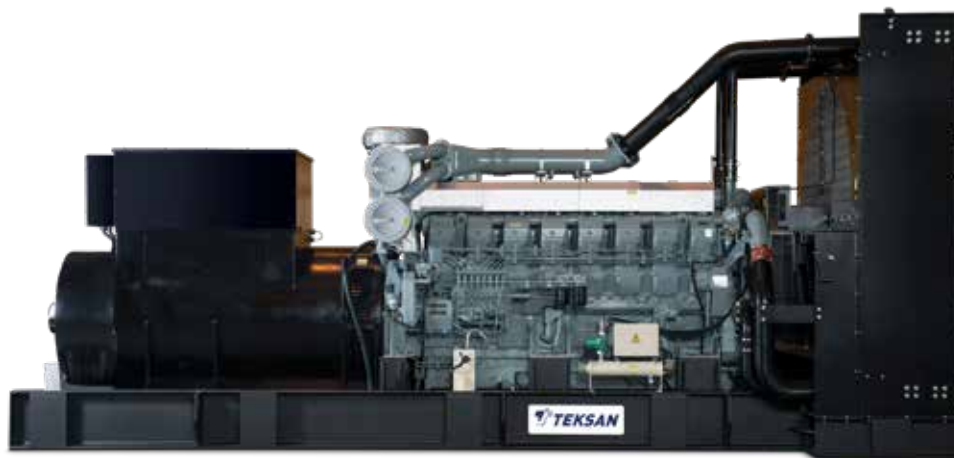

* The indicated Prime Power (PRP) is for reference only. This generator set is designed for emergency standby power (ESP) applications only.

** SC: Standart Canopy, DOC: Drop Over Canopy, CC: Container Canopy

• Technical information and values comply with ISO8528, ISO3046, NEMA MG-1.22, IEC600341, BS4999-5000, VDE0530 standards.

• Production in accordance with ISO ISO9001, ISO14001, OHSAS18001, TSE, CE standards.

• Due to policy of continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sale

GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)								WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**				OPEN SKID	CANOPIED	OPEN SKID	CANOPIED	
				Width	Length	Height	Canopy Type	Width	Length	Height					



TJ10BD	4M06G20/5	11	10	950	1650	1060	HK	950	2200	1450	683	957	90	90
TJ15BD	4M06G20/5	14	13	950	1650	1060	HK	950	2200	1450	521	795	90	90
TJ17BD	4M06G20/5	17	15	950	1650	1060	HK	950	2200	1450	544	818	90	90
TJ20BD	4M06G20/5	21	20	950	1650	1060	HK	950	2200	1450	556	830	90	90
TJ25BD	4M06G25/5	26	24	950	1650	1060	HK	950	2200	1450	589	863	90	90
TJ35BD	4M06G35/5	35	31	950	1650	1060	HK	950	2200	1450	592	866	90	90
TJ45BD	4M06G44/5	44	40	950	1650	1060	HK	950	2200	1450	613	887	90	90
TJ50BD	4M06G50/5	50	45	950	2000	1060	HK	950	2650	1450	704	1018	160	160
TJ60BD	4M06G55/5	58	52	950	2000	1060	HK	950	2650	1450	737	1051	160	160
TJ70BD	4M11G70/5	69	63	1100	2350	1295	HK	1100	3320	1600	1144	1565	260	260
TJ75BD	4M11G70/5	72	65	1100	2350	1295	HK	1100	3320	1600	1194	1615	260	260
TJ85BD	4M11G90/5	83	75	1100	2350	1295	HK	1100	3320	1600	1194	1615	260	260
TJ90BD	4M11G90/5	88	80	1100	2350	1295	HK	1100	3320	1600	1233	1654	260	260
TJ100BD	4M11G120/5	100	90	1100	2350	1325	HK	1100	3320	1600	1241	1662	260	260
TJ110BD	4M11G120/5	110	100	1100	2350	1325	HK	1100	3320	1600	1296	1717	260	260
TJ120BD	4M11G120/5	122	110	1100	2350	1325	HK	1100	3320	1600	1357	1778	260	260
TJ140BD	6M11G150/5	138	125	1200	2700	1500	HK	1200	3860	1850	1492	2033	330	330
TJ150BD	6M11G150/5	152	140	1200	2700	1500	HK	1200	3860	1850	1548	2089	330	330
TJ165BD	6M11G165/5	168	152	1200	2700	1500	HK	1200	3860	1850	1587	2128	330	330
TJ180BD	6M16G220/5	182	165	1300	3000	1570	HK	1300	3940	1850	1919	2484	385	385
TJ220BD	6M16G220/5	220	200	1300	3000	1570	HK	1300	3940	1850	2040	2605	385	385
TJ255BD	6M16G250/5	261	237	1300	3000	1570	HK	1300	3940	1850	2205	2770	385	385



EN * The indicated Prime Power (PRP) is for reference only. This generator set is designed for emergency standby power (ESP) applications only.

** SC: Standart Canopy, DOC: Drop Over Canopy, CC: Container Canopy

• Technical information and values comply with ISO8528, ISO3046, NEMA MG-1.22, IEC600341, BS4999-5000, VDE0530 standards.

• Production in accordance with ISO 9001, ISO 14001, OHSAS 18001, TSE, CE standards.

• Due to policy of continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sale

GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)						WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**			OPEN SKID kg	CANOPIED kg	OPEN SKID lt	CANOPIED lt
				Width	Length	Height	Canopy Type	Width	Length				



TJ275BD	6M16G275/5	275	250	1300	3000	1570	HK	1300	3940	1850	2205	2770	385	385
TJ290BD	6M16G275/5	291	265	1300	3000	1570	HK	1300	3940	1850	2339	2904	385	385
TJ330BD	6M16G350/5	330	300	1300	3000	1600	HK	1300	3940	1850	2260	2825	385	385
TJ350BD	6M16G350/5	350	323	1300	3000	1600	HK	1300	3940	1850	2459	3024	385	385
TJ400BD	6M21G400/5	415	380	1650	3300	1710	HK	1650	5000	2250	2966	3952	900	900
TJ440BD	6M21G440/5	440	402	1650	3300	1710	HK	1650	5000	2250	3051	4037	900	900
TJ500BD	6M21G500/5	503	TBA	1650	3300	1710	HK	1650	5000	2250	3360	4346	900	900
TJ540BD	6M26G550/5	540	492	1650	3760	2064	HK	1650	5360	2450	4421	5562	970	970
TJ550BD	6M33G715/5	550	500	1700	3680	2260	HK	2200	5820	2400	4976	7576	1135	1600
TJ660BD	6M33G715/5	660	600	1700	3620	2260	HK	2200	5820	2400	4912	7512	1135	1600
TJ690BD	6M33G715/5	688	625	1700	3780	2260	HK	2200	5820	2400	5230	7830	1135	1600
TJ715BD	6M33G715/5	716	647	1700	3830	2260	HK	2200	5820	2400	5163	7763	1135	1600
TJ750BD	6M33G750/5	750	680	1700	3850	2315	HK	2200	5820	2400	5429	8029	1135	1135
TJ825BD	6M33G825/5	825	750	1700	3850	2315	HK	2200	5820	2400	5173	7773	1135	1600
TJ900BD	12M26G900/5	912	832	1700	3905	2315	HK	2200	5820	2400	7133	9563	1300	1600
TJ1000BD	12M26G1000/5	1041	945	1700	3905	2315	HK	2200	5820	2400	7133	9563	1300	1600
TJ1100BD	12M26G1100/5	1110	1010	1700	3905	2315	HK	2200	5820	2400	7133	9563	1300	1600
TJ1250BD	12M33G1250/5	1275	1157	1840	4555	2640	KK	2470	9145	3150	8208	14288	TBA	TBA
TJ1400BD	12M33G1400/5	1400	1250	1840	4555	2640	KK	2470	9145	3150	8251	14331	TBA	TBA
TJ1500BD	12M33G1500/5	1520	1385	TBA	TBA	TBA	KK	2470	9145	3150	TBA	TBA	TBA	TBA
TJ1900BD	16M33G1900/5	1930	1753	2250	5300	2840	KK	2470	9145	3150	10057	16297	TBA	TBA
TJ2050BD	16M33G2000/5	2076	1936	TBA	TBA	TBA	KK	TBA	TBA	TBA	TBA	TBA	TBA	TBA



EN * The indicated Prime Power (PRP) is for reference only. This generator set is designed for emergency standby power (ESP) applications only.

** SC: Standart Canopy, DOC: Drop Over Canopy, CC: Container Canopy

• Technical information and values comply with ISO8528, ISO3046, NEMA MG-1.22, IEC600341, BS4999-5000, VDE0530 standards.


• Production in accordance with ISO ISO9001, ISO14001, OHSAS18001, TSE, CE standards.

• Due to policy of continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sale

GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)								WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**					OPEN SKID	CANOPIED	OPEN SKID	CANOPIED
				Width	Length	Height	Canopy Type	Width	Length	Height	kg	kg	lt	lt	

ECOTORQ

TJ275EC	9G30	275	250	1650	3060	1970	HK	1650	4700	2250	2531	3451	780	780
TJ300EC	9G30	304	281	1650	3060	1970	HK	1650	4700	2250	2765	3685	780	780
TJ360EC	13G45	360	325	1650	3300	1970	HK	1650	5000	2250	3160	4146	900	900
TJ400EC	13G45	415	380	1650	3300	1970	HK	1650	5000	2250	3301	4287	900	900
TJ440EC	13G45	440	400	1650	3300	1970	HK	1650	5000	2250	3386	4372	900	900
TJ450EC	13G45	451	410	1650	3300	1970	HK	1650	5000	2250	3285	4271	900	900
TJ500EC	13G55	500	455	1650	3300	1970	HK	1650	5000	2250	3414	4400	900	900
TJ550EC	13G55	550	500	1650	3300	1970	HK	1650	5000	2250	3625	4611	900	900

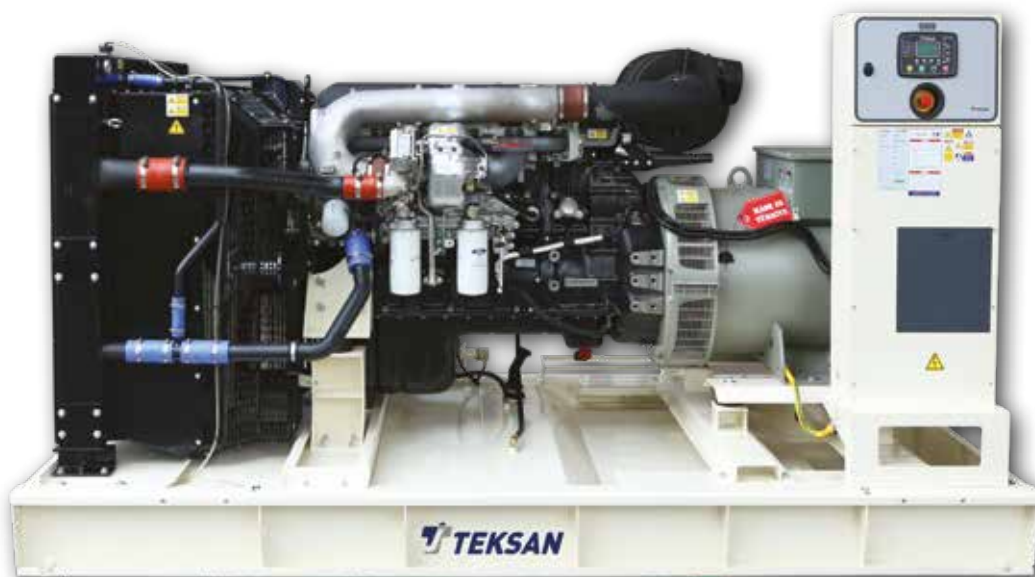

EN * The indicated Prime Power (PRP) is for reference only. This generator set is designed for emergency standby power (ESP) applications only.

** SC: Standart Canopy, DDC: Drop Over Canopy, CC: Container Canopy

• Technical information and values comply with ISO8528, ISO3046, NEMA MG-1.22, IEC600341, BS4999-5000, VDE0530 standards.

• Production in accordance with ISO ISO9001, ISO14001, OHSAS18001, TSE, CE standards.

• Due to policy of continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sale

GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)								WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**					OPEN SKID	CANOPIED	OPEN SKID	CANOPIED
				Width	Length	Height	Canopy Type	Width	Length	Height	kg	kg	lt	lt	

YAVUZ MOTOR

TJ35YM	3104G	35	32	950	1650	1170	HK	950	2200	1450	687	961	90	90
TJ45YM	4104G	44	43	950	2000	1170	HK	950	2650	1450	783	1097	160	160
TJ70YM	4204G	70	65	950	2000	1270	HK	950	2650	1450	877	1191	160	160
TJ90YM	4304G	88	83	1100	2350	1270	HK	1100	3320	1600	1013	1434	260	260
TJ100YM	4304G	100	91	1100	2350	1270	HK	1100	3320	1600	1101	1522	260	260
TJ110YM	4304.C3G	110	100	1100	2350	1270	HK	1100	3320	1600	1101	1522	260	260



EN * The indicated Prime Power (PRP) is for reference only. This generator set is designed for emergency standby power (ESP) applications only.

** SC: Standart Canopy, DOC: Drop Over Canopy, CC: Container Canopy

• Technical information and values comply with ISO8528, ISO3046, NEMA MG-1.22, IEC600341, BS4999-5000, VDE0530 standards.

• Production in accordance with ISO 9001, ISO 14001, OHSAS 18001, TSE, CE standards.

• Due to policy of continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sale

GENSET MODEL	ENGINE MODEL	50 Hz / 400 V		DIMENSIONS (mm)								WEIGHT (kg)		FUEL TANK (lt)	
		kVA ESP	kVA PRP	OPEN SKID			CANOPIED**				OPEN SKID	CANOPIED	OPEN SKID	CANOPIED	
				Width	Length	Height	Canopy Type	Width	Length	Height	kg	kg	lt	lt	



TJ10ER	EDM0101011612ML	10	9	700	1250	1000	HK	700	1750	1200	TBA	TBA	75	75
--------	-----------------	----	---	-----	------	------	----	-----	------	------	-----	-----	----	----



* The indicated Prime Power (PRP) is for reference only. This generator set is designed for emergency standby power (ESP) applications only.


** SC: Standart Canopy, DDC: Drop Over Canopy, CC: Container Canopy

• Technical information and values comply with ISO8528, ISO3046, NEMA MG-1.22, IEC600341, BS4999-5000, VDE0530 standards.

• Production in accordance with ISO ISO9001, ISO14001, OHSAS18001, TSE, CE standards.

• Due to policy of continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sale

Notes :

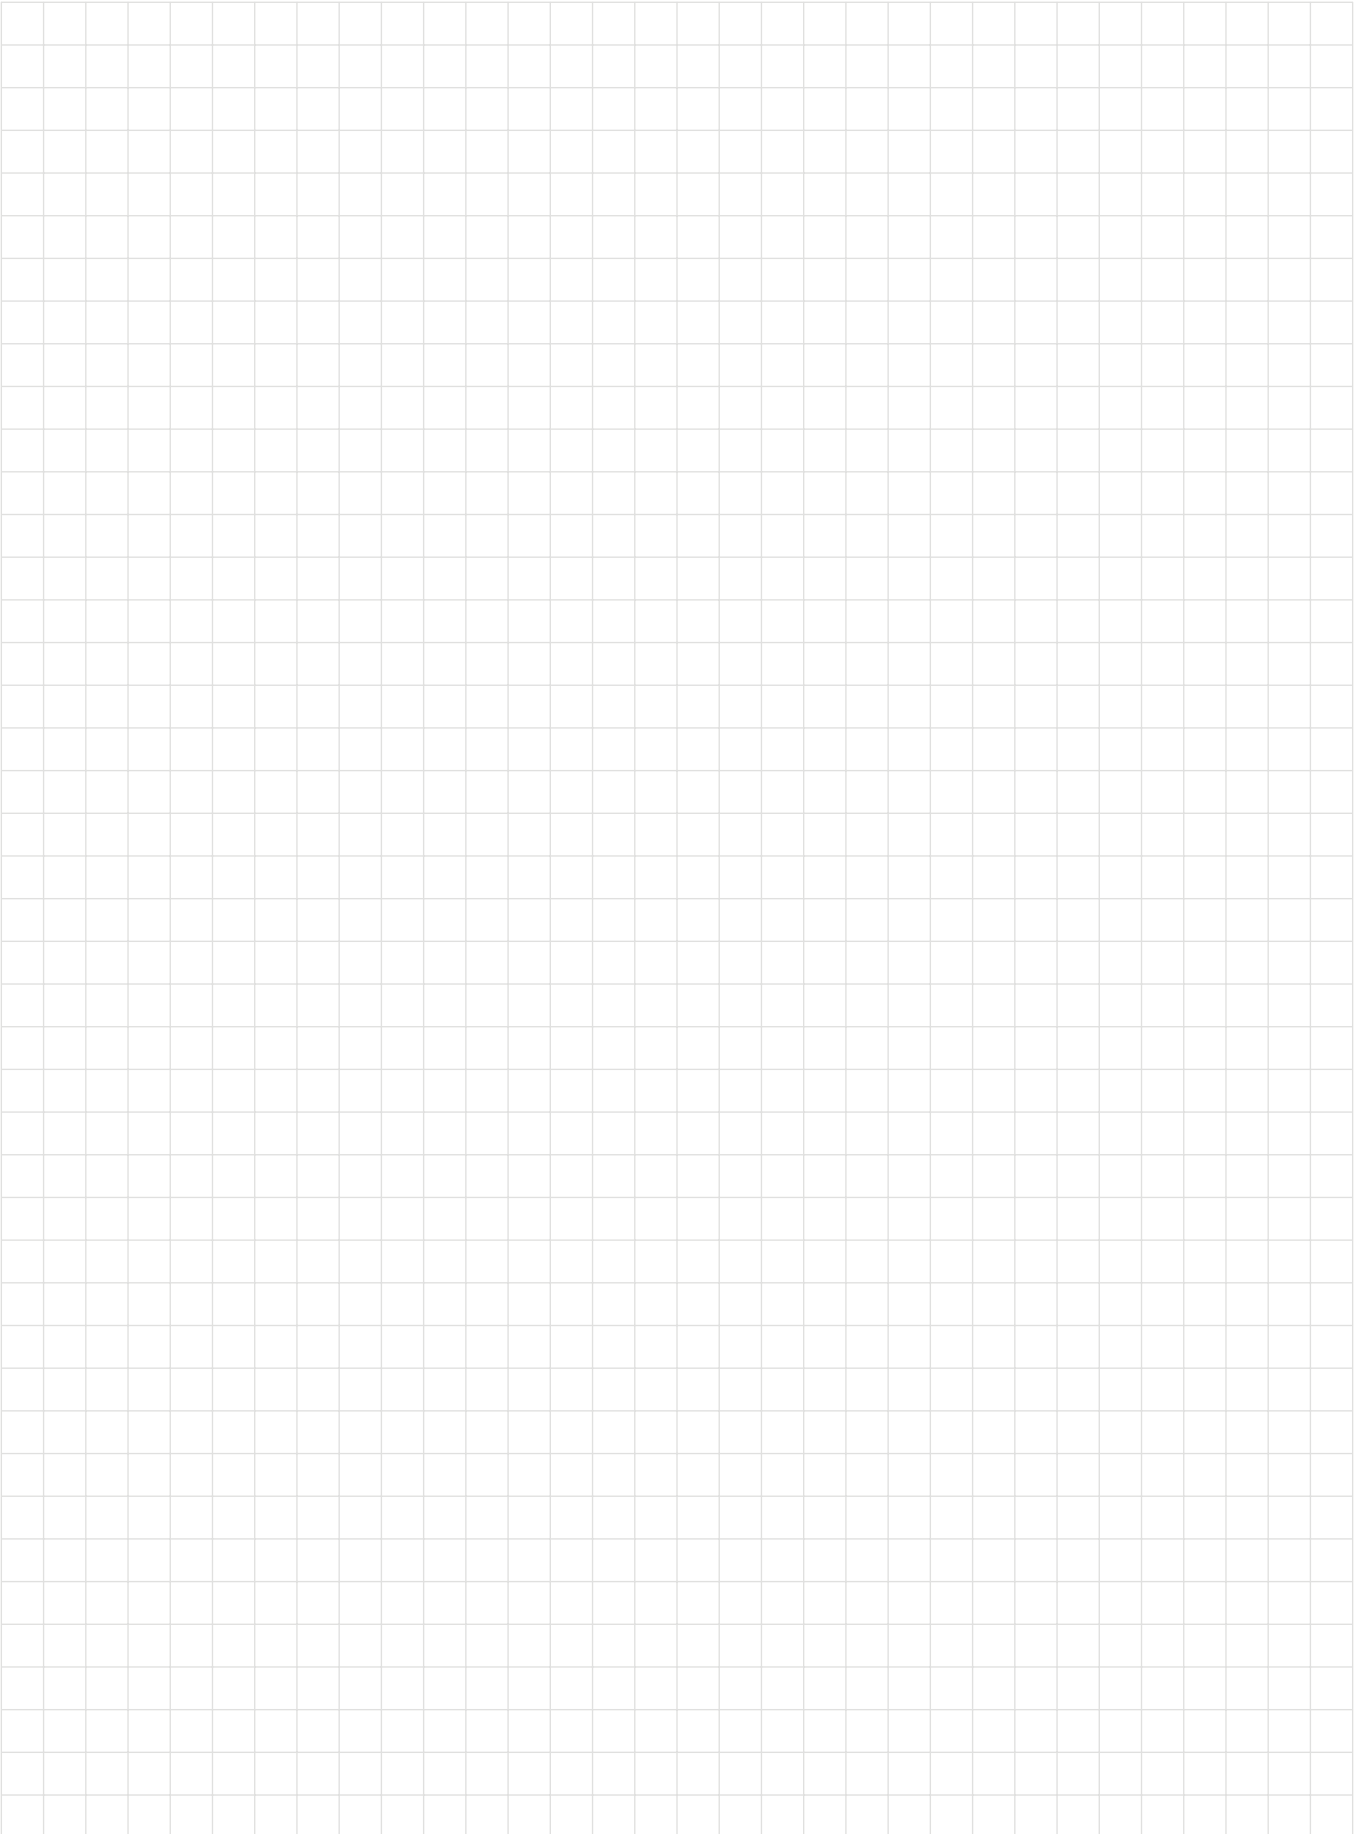

**WE ARE YOUR
EVERLASTING
COMPANY**



+90 444 8576
www.teksan.com
info@teksan.com

TEKSAN